ENVELOPES

File Specifications:


- > Bleed: NO Bleed is required on any envelope art
- > Recommended Safe Zone: 10mm from top, 3mm in from base and sides of envelope and around window (if window is required)
- > Accepted File Types: PDF version 1.4 or higher
- > Recommended Resolution: Minimum of 300 dpi for all images and less than 200% ink density

Essentials:

- > Colours must be either CMYK, PMS or black (100% K only). Please convert all RGB
- All fonts must be embedded or converted to curves so they print correctly

DL ENVELOPES (OPENING ON LONG EDGE)

SIZE: II0mm x 220mm

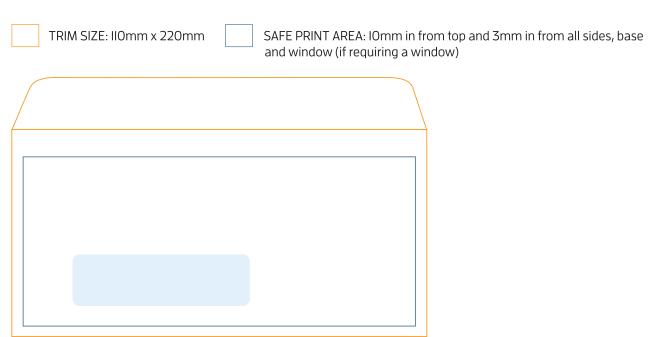

> Standard window is 28mm x 95mm, 32mm fom the left and 16mm from the base



C5 ENVELOPES (OPENING ON LONG OR SHORT EDGE)

SIZE: 162mm x 229mm

	TRIM SIZE: I62mm x 229mm SAFE PRINT AREA: I0mm in from top and 3mm in from all sides and base
	ENVELOPES (OPENING ON LONG OR SHORT EDGE) : 229mm x 324mm
SIZE	
	TRIM SIZE: 229mm x 324mm SAFE PRINT AREA: I0mm in from top and 3mm in from all sides and base

- > Artwork can be Black only, 1PMS, 2PMS, 3PMS or CMYK
- Artwork colours must be specified when requesting a quote
- > Standard quotes allow for upto 25% ink coverage